Groundwater Remediation

The goal of groundwater remediation is to restore the groundwater to its potential beneficial uses- in turn, protecting human health and the environment, controlling plume migration, and protecting the Columbia River.

Groundwater Glossary

Groundwater is water filling in the cracks or pores between rocks or grains of sand at varying depths below ground surface.

An **aquifer** is an area where water moves easily, and its pores are completely saturated, much like a sponge full of water.

Confined aquifers are areas where the aquifer is contained between impervious (solid) layers.

Unconfined groundwater moves through saturated layers in the ground, slowly working its way in or out of the earth. Depending on the geology of an area, groundwater may rise to the surface through springs, or seeps; flow laterally into nearby rivers, streams, or ponds; or sink deeper into the earth.

The top of an unconfined aquifer is known as the **water table**. The **vadose zone** is the area between ground surface and the water table.

Groundwater is replaced or "recharged" from the surface, or from nearby rivers, lakes, or streams. Some groundwater recharge occurs quickly, some occurs slowly. If too much water is pumped from wells, recharge by natural precipitation or surface water flows may not be enough to maintain the water level. Groundwater can also build up, or mound, in areas where water used for industry or irrigation is discharged to the ground. Hanford had several areas where groundwater mounded as facilities discharged water to the ground.

Groundwater at Hanford generally flows from west to east, or toward the Columbia River. As facilities closed, groundwater mounds diminished, lowering water tables. Recently, water tables in the 200 Area have dropped, changing groundwater flow in some places or leaving monitoring wells high and dry. Some wells have been replaced with deeper wells.

Once groundwater becomes contaminated it is difficult and costly to remediate. Therefore, the best way to protect the groundwater is to prevent any future contamination.

C3T Groundwater Strategy



Properly disposing of contaminated soil prevents further deterioration of groundwater.

This is the first in a series of educational brochures about Hanford's groundwater.

The remaining brochures explain available remediation techniques, and provide case studies of both successful and problematic groundwater cleanup actions.



The "In-Situ Redox Manipulation" process uses an innovative chemical process to immobilize groundwater contaminants below ground surface. In-situ, or on site treatment allows cleanup without having to remove the groundwater for treatment.

If you need this publication in an alternate format, please call the Nuclear Waste Program at 509-372-7950. Persons with hearing loss can call 711 for Washington Relay Service. Persons with a speech disability can call 877-833-6341.



Call the Hanford Cleanup Line at 1-800-321-2008 for more information.

Ecology Publication Number 02-05-015


Cleaning Up Hanford's Groundwater The White Bluffs - photo courtesy of PNNL "Picture This" collection.

Hanford's Groundwater Remediation Strategy

Tri-Party Agencies (U.S. Dept. of Energy, U.S. Environmental Protection Agency, and Washington State Dept. of Ecology) and Hanford contractors jointly developed a strategy for protecting Hanford's groundwater. The strategy is focused on protecting the Columbia River by controlling migration of existing contaminant plumes, developing new technology, remediating contaminated areas, and improving Hanford's monitoring efforts.

Hanford History

As part of the Manhattan Project- the United States effort to build the first atomic bomb- the Hanford area was selected for producing plutonium for nuclear weapons. Hanford continued producing plutonium during the "Cold War" creating huge amounts of liquid and solid waste. In some areas, waste was disposed of directly to the soil. In other areas, facilities, and/or tanks, waste leaked through the soil and reached the groundwater. Unfortunately, some contaminants have reached the Columbia River.

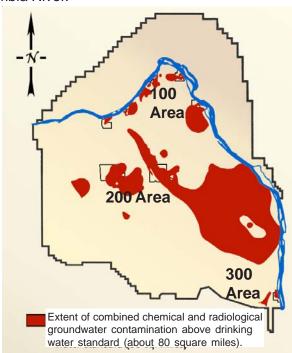

Key Elements of Hanford's Groundwater Remediation Strategy

- Place a high priority on actions that protect the Columbia River and near-shore environment from degradation.
- 2. Control the migration of plumes that threaten or continue to degrade groundwater quality beyond the boundaries of the Central Plateau.
- **3.** Develop and deploy alternative remediation technologies where needed.
- **4.** Avoid recontamination of the sites already cleaned, or those currently undergoing remediation.
- **5.** Integrate all site monitoring needs to determine required actions.

Proposed Initiatives in the Strategy

- Optimize current groundwater remediation systems, such as pump and treat, to maximize benefits.
- 2. Identify, characterize, and remove or immobilize the possible sources of contamination from the vadose zone, using excavation or innovative technologies to prevent the spread of contaminants.
- 3. Protect the rivershore.
- 4. Close abandoned wells in vicinity of waste sites.
- **5.** Promote, develop, and implement new technologies for cleaning groundwater.

Groundwater Facts

About 80 square miles of Hanford's groundwater has contaminant levels above federal and state drinking water standards. Some of those pollutants have reached the Columbia River.

The major chemical contaminants include nitrate, chromium, and carbon tetrachloride. Major radioactive contaminants include, uranium, technetium-99, tritium, strontium-90, and iodine-129.

What's a pico-Curie?

A Curie is a unit of radioactivity- the amount of any nuclide that undergoes exactly 37 billion radioactive disintegrations per second. Pico means one trillionth, or 10⁻¹². Concentration of radionuclides in groundwater is measured in pico-Curies per liter (pCi/L).

Monitoring measures how effective protection is in its end goal and ensures early warning in case of contamination.

Monitoring

Protection

impact and to gather data to help with Remediation.

If monitoring detects

any contamination,

then scientists will

assess the site to

determine the extent

and magnitude of the

Remediation

Remediation protects by mitigating any further degradation of the groundwater and by removing or immobilizing the current contamination.

For more information on Hanford groundwater issues please surf over to the report, Hanford Site **Groundwater Monitoring** for Fiscal Year at http://hanford-site.pnl.gov.

Sources of Groundwater Contamination

What's a Half-Life?

The radioactive half-life for a given radioisotope is the time for half the radiation to decay. After two half-lives, there will be one fourth the original radiation, after three half-lives, one eighth the original radiation, and so forth.

Pits, Burial

Landfills

Trenches, &

Solid and liquid wastes in

barrels were buried in

trenches, pits, or unlined

landfills. As the contain-

ers break down, contami-

Reverse Wells

Also known as injection wells, reverse wells served as disposal areas for liquid contaminants by pumping them directly back into the soil.

Underground Storage Tanks

There are 177 tanks at Hanford storing more than 53 million gallons of high and low-level waste. Sixty-seven single shell tanks are known, or suspected to have leaked. It is estimated that past releases have amounted to about 1 million gallons.

How Are Chemicals Measured?

billion (ppb) in a liter of used interchangeably with milligrams per liter (mg/L).

Discharge


Some facilities at Hanford disposed of waste directly to the soil outside the facility.

Organic and inorganic chemicals are measured in parts per million (ppm), or water. Sometimes ppm is

Plant Waste

use has been permanently discontinued, or which is in such disrepair that its continued use is impractical. or is an environmental, safety, or public health

Any well which is unusable, abandoned, or whose

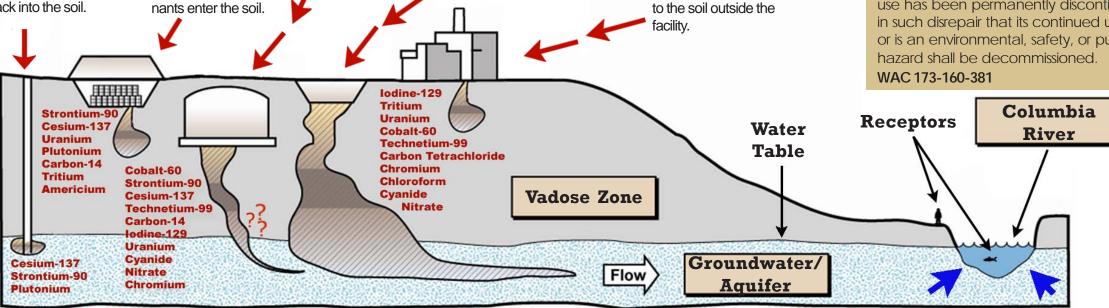

Cribs, Ponds,

& French Drains

Cooling and waste water

was directed to storage

ponds, trenches, cribs or

French drains (perforated

pipes allowed liquid to re-

lease into rock-lined, soil-

covered trenches).

Trenches,

Carbon Tetrachloride Carbon tetrachloride, an or-

ganic chemical, is found in the 200 West Area and contaminates about 4.2 square miles of aroundwater is contaminated above drinking water standards. The drinking water standard is 5 ppb. It hasn't been found in wells near the Columbia River. Studies indicate contaminants may reach the Columbia sometime in the future. Remediation to control plume expansion and migration of carbon tetrachloride is underway.

Chromium

Chromium, an inorganic chemical, contaminates one square mile of groundwater near H, D, and K Reactors in the 100 Area. Hanford is persuing a more stringent cleanup than required by the drinking water standard, in order to protect aquatic species. Chromium has entered the Columbia River. Remediation of chromium has successfully reduced toxicity and is slowing the flux of chromium contamination entering the river.

lodine-129

In the 200 East Area, iodine-129 contaminates about 33 square miles of groundwater. The drinking water standard is 1 pCi/L. Remediation technology is not currently available.

TEXT COLOR KEY

area of contamination

remediation unavailable

remediation underway

Nitrates

Nitrates are an inorganic contaminant. About 16 square miles of Hanford groundwater are contaminated with nitrate. The drinking water standard for nitrates is 45 ppm, or as nitrogen is 10 ppm. Nitrate contamination has reached the Columbia River. Average contamination is slightly above drinking water standard. Large scale remediation of nitrate from groundwater is impractical. Hanford is not the main source of nitrates to the river.

Strontium-90

Strontium, a radioactive contaminant, pollutes a square mile of groundwater, mostly in the vicinity of the N Area. and 200 East Area. Strontium-90 has entered the Columbia River. The drinking water standard is 8 pCi/L. Remediation is underway and has reduced the flux of strontium-90 entering the

Technetium-99

Technetium-99 is a long-lived radionuclide. In the 200 West Area, technetium-99 contaminates about a squaremile. The drinking water standard is 900 pCi/L. Studies show that technetium-99 may reach the Columbia River in the future. Remediation is underway to control plume expansion.

Tritium

What Does the Law Say?

RCW 36.36.010

RCW 90.54.010

beneficial use of groundwater.

or degradation is of great concern.

Washington State's Model Toxics Control Act

require cleanup levels to be based on highest

(MTCA), and the federal Superfund law (CERCLA),

The protection of subterranean water from pollution

It is the intent of the legislature to work closely with

the executive branch, Indian tribes, local govern-

ment, and interested parties to ensure that water

resources of the state are wisely managed.

Tritium is a radioactive contaminant. The largest tritium plume originates in the 200 East Area, however, it is found throughout Hanford groundwater. About 70 square miles are contaminated, and it has entered the Columbia River. The drinking water standard for tritium is 20,000 pCi/L. Remediation technology is not currently available. However, tritium has a short halflife, so natural decay will play a major role in reducing contamination over time.

Uranium

Uranium contaminates about a square mile of groundwater in the 200 West Area and 300 Area. The 300 Area plume has entered the Columbia River. The drinking water standard is 27 pCi/L. Interim remediation to remove uranium is being conducted in the 200 West Area. In the 300 Area, natural attenuation for uranium is imple-

Major Types of Groundwater Contamination